
www.b-safety.com

BR 023 995 PremiumLine safety shower valve with draining, wall mounted



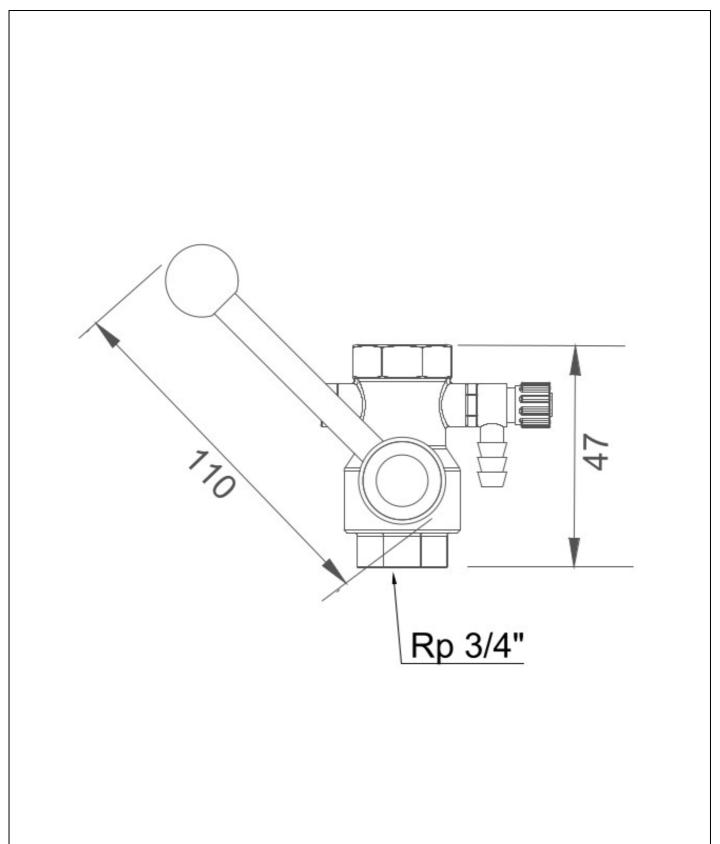

PremiumLine

www.b-safety.com

Technical description

PremiumLine safety shower valve with draining, wall mounted

- ball valve with lever actuation of stainless steel, DIN-DVGW tested and certificated, water inlet 3/4" female
- flow rate at least 60 l/min at 1 bar flow pressure
- lever made of stainless steel, polished, total length 110 mm
- robust ball handle of plastics, black, diameter 30 mm
- actuation via swivel lever, opening angle 90°, not self-closing
- integrated draining valve for automatic or manual emptying
- information sign "OPEN" for confusion-free use in an emergency, orange, photoluminescent according to DIN 67510
- mounting height for lever according to the standards listed below: 0 to 1750 mm height above floor
- according to BGI/GUV-I 850-0, DIN 1988 and EN 1717
- according to ANSI Z358.1-2014, EN 15154-1:2006 and EN 15154-5:2019

Manufacturer: B-SAFETY or equal

Article-No.: BR 023 995

Technical	enecifi	cations

Minimum flow pressure: 1 bar

Operating pressure: 1 to 5 bar

Flow rate: at least 60 l/min at 1 bar flow pressure

Water inlet: 3/4" female
Water drain (outside): 8 mm

Dimensions (H x W x D): 100 x 90 x 90 mm

Norm conformity Approvals

- EN 15154-1:2006

- EN 15154-5:2019

- ANSI Z358.1-2014

Mounting-Instructions

For an installation in accordance with EN 15154-1:2006 it must be ensured, that the safety shower installation is self-draining between valve and shower head.

Material overview	Material	Material description
Ball valve:	stainless steel	AISI 316
Lever:	stainless steel	AISI 316
Draining valve:	plastic	-
Ball handle, round cover:	plastic	-

Product overview	
BR 023 995	PremiumLine safety shower valve with draining, wall mounted



Web: www.b-safety.com - E-Mail: info@b-safety.com