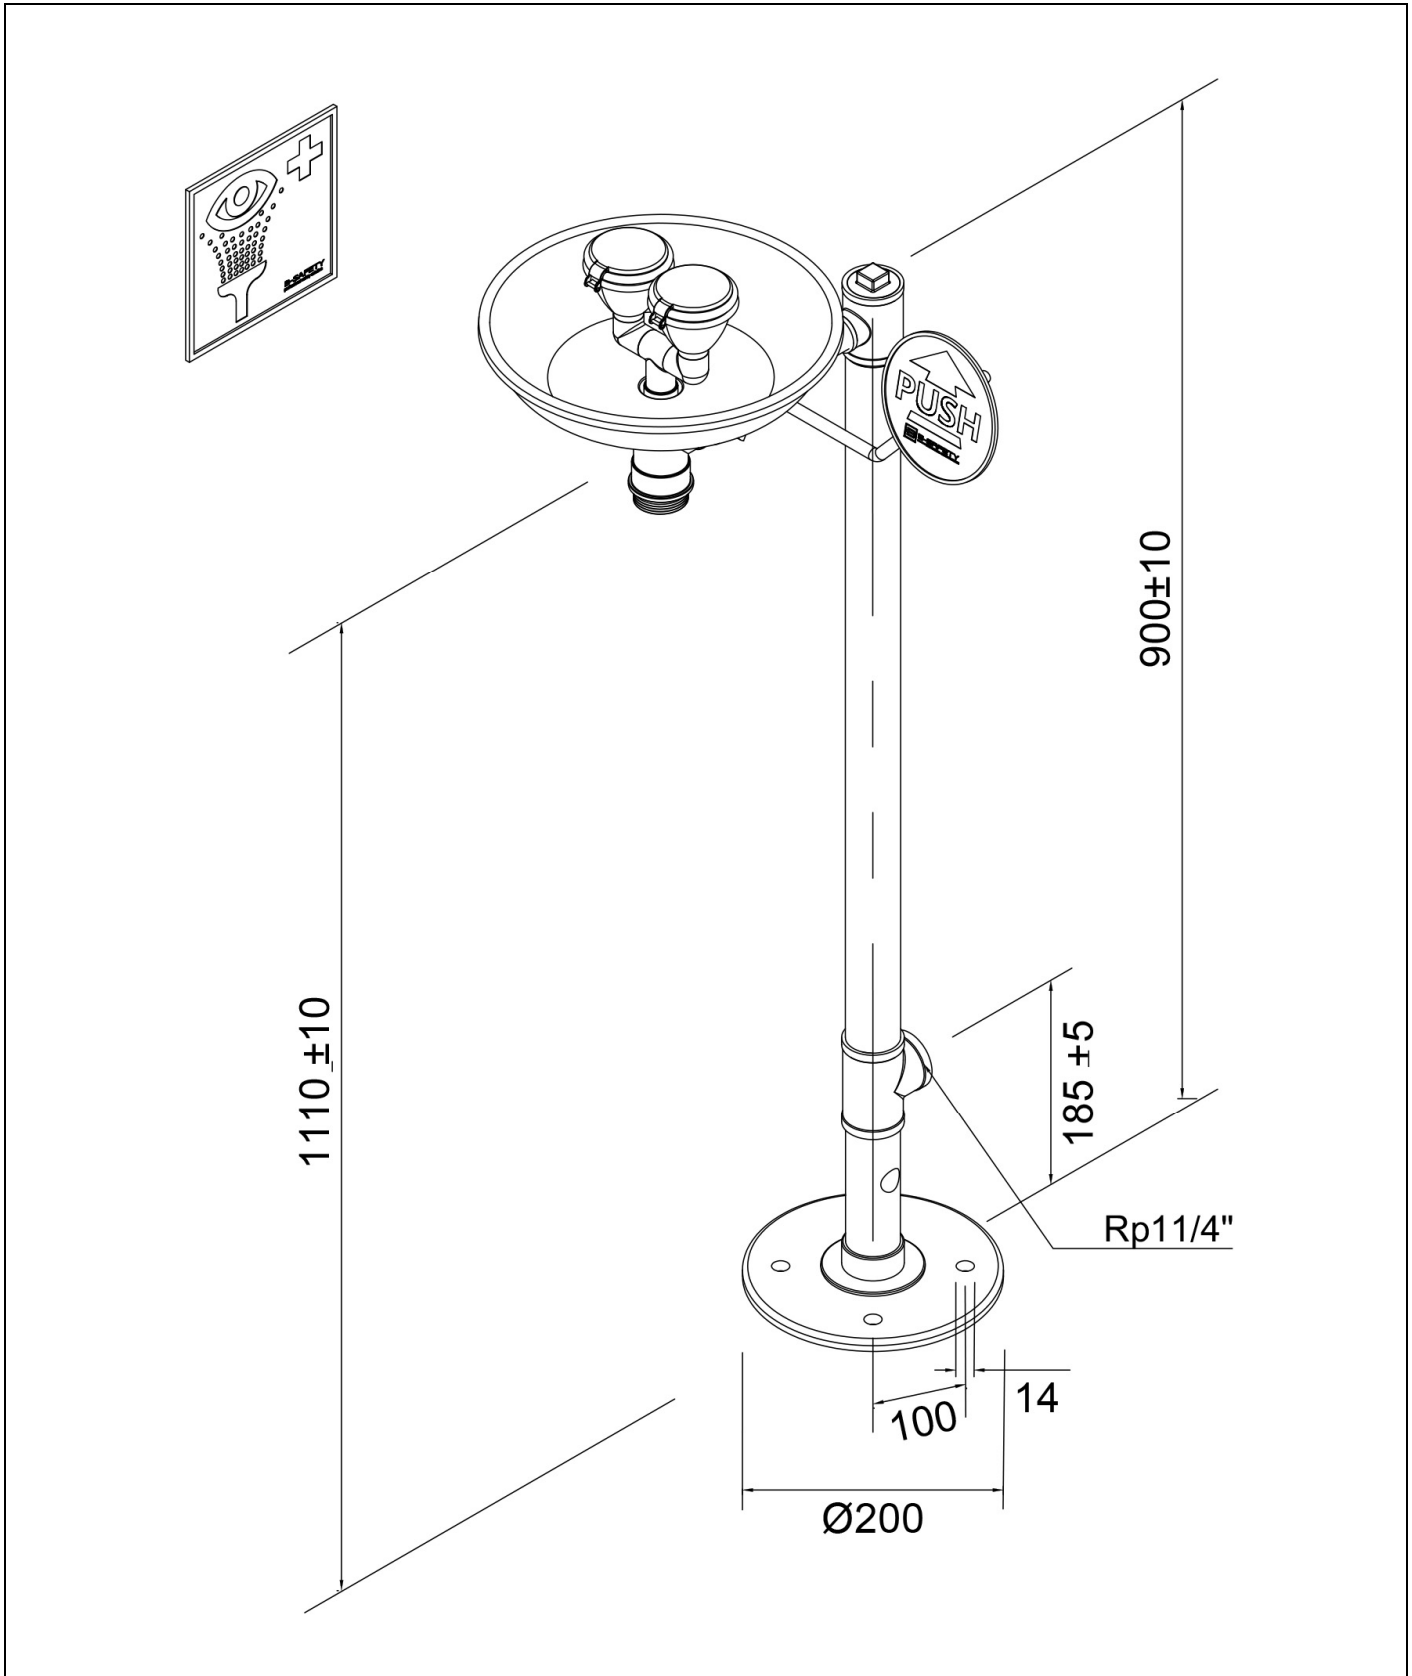


BR 305 085

ClassicLine safety eye shower with bowl, floor mounted



**Technical description**

ClassicLine safety eye shower with bowl, floor mounted

- base plate with 4 mounting holes of stainless steel, chemical resistant green powder coated, dimensions 200 x 200 mm
- stand pipe 1 ¼" of stainless steel, chemical resistant green powder coated, with top and bottom water inlet 1 ¼" female, total height 1040 mm
- connection pipe of stainless steel for easy installation and alignment of the shower, chemical resistant green powder coated
- ball valve ½" of stainless steel, with PUSH-lever actuation, DIN-DVGW tested and certificated
- push plate made of steel, chemical resistant green powder coated, length 240 mm, with large signal "PUSH", luminescent according to DIN 67510
- integrated flow regulation 14 litre / minute for a standard-compliant jet pattern at a specified working range of 2.5 to 5 bar flow pressure
- high-performance spray heads for large-scale dispersion of water, with plastic spray plate, low calcification, incl. rubber sleeves and sealed dust caps, mounted over distributor fork
- bowl made of plastic, green, diameter 275 mm, water outlet 1 ¼" male
- sign for eye shower according to EN ISO 7010 und ASR A1.3, self-adhesive PVC-film, 100 x 100 mm, viewing distance 10 metre
- total height 1040 mm, projection 425 mm, total width incl. lever 400 mm
- according to BGI/GUV-I 850-0, DIN 1988 and EN 1717
- according to ANSI Z358.1-2014 and EN 15154-2:2006
- DIN-DVGW tested and certificated

Manufacturer: B-SAFETY or equal  
 Article-No.: BR 305 085

**Technical specifications**

Minimum flow pressure:	2.5 bar
Operating pressure:	2.5 to 5 bar
Flow rate:	14 l/min
Water inlet:	1 ¼ female
Water outlet:	1 ¼ male
Dimensions (H x W):	1040 x 400 mm

**Compliance with standards**

- EN 15154-2:2006
- ANSI Z358.1-2014

**Approvals**

- DIN-DVGW, NW-0417CL0263
- GOST-R, Zertifikats-Nr. 0615463

**Material overview**

**Material**







**Material description**

High-performance shower head:	plastic POM, EPDM	-
U-distributor:	plastic POM	-
Ball valve:	stainless steel	AISI 316
Push plate:	steel	-
Flow regulator:	plastic POM	-
Piping, T-pieces, adapter:	stainless steel	AISI 304
Bowl:	plastic ABS	-
Base plate:	stainless steel	AISI 201
Sign for eye shower:	PVC-foil	-

[www.b-safety.com](http://www.b-safety.com)

<b>Product overview</b>	
<b>BR 305 085</b>	ClassicLine freestanding safety eye shower with stainless steel bowl

### Accessories for safety eye showers

Product overview	Model	Material	Water inlet	Water outlet	Article-No.
	Maintenance ball valve for safety showers with removable trigger lever.	stainless steel	1 1/4" female	1 1/4" female	<b>BR 830 950</b>
	Foot lever actuation for eye showers, in addition to the standard actuation.	plastic	-	-	<b>BR 870 370</b>
	Thermostatic mixing valve for eye showers, adjustment range 20 - 43°C, scald protection 43°C, flow rate max. 20 l/min.	brass	1/2" male and 3/4" male	1/2" male and 3/4" male	<b>BR 710 940</b>
	Flow switch for eye showers and safety showers, protection degree IP 65, electrical supply with 1.5 m cable.	brass	1 1/4" female	1 1/4" female	<b>BR 710 860</b>
	Emergency switch for eye showers, complete pre-mounted on shower, for EX-zones 1 & 2.	plastic	-	-	<b>BR 830 450</b>
	Alarm system for eye showers & safety showers with siren-/flashlight combination. Prewired junction box inclusive electronic switch.  Electrical supply: 230 V - 50 Hz	-	-	-	<b>BR 015 800</b>