


BR 887 395

PremiumLine frostprotected self-draining eye shower station with surrounding protection cage, with underfloor actuation

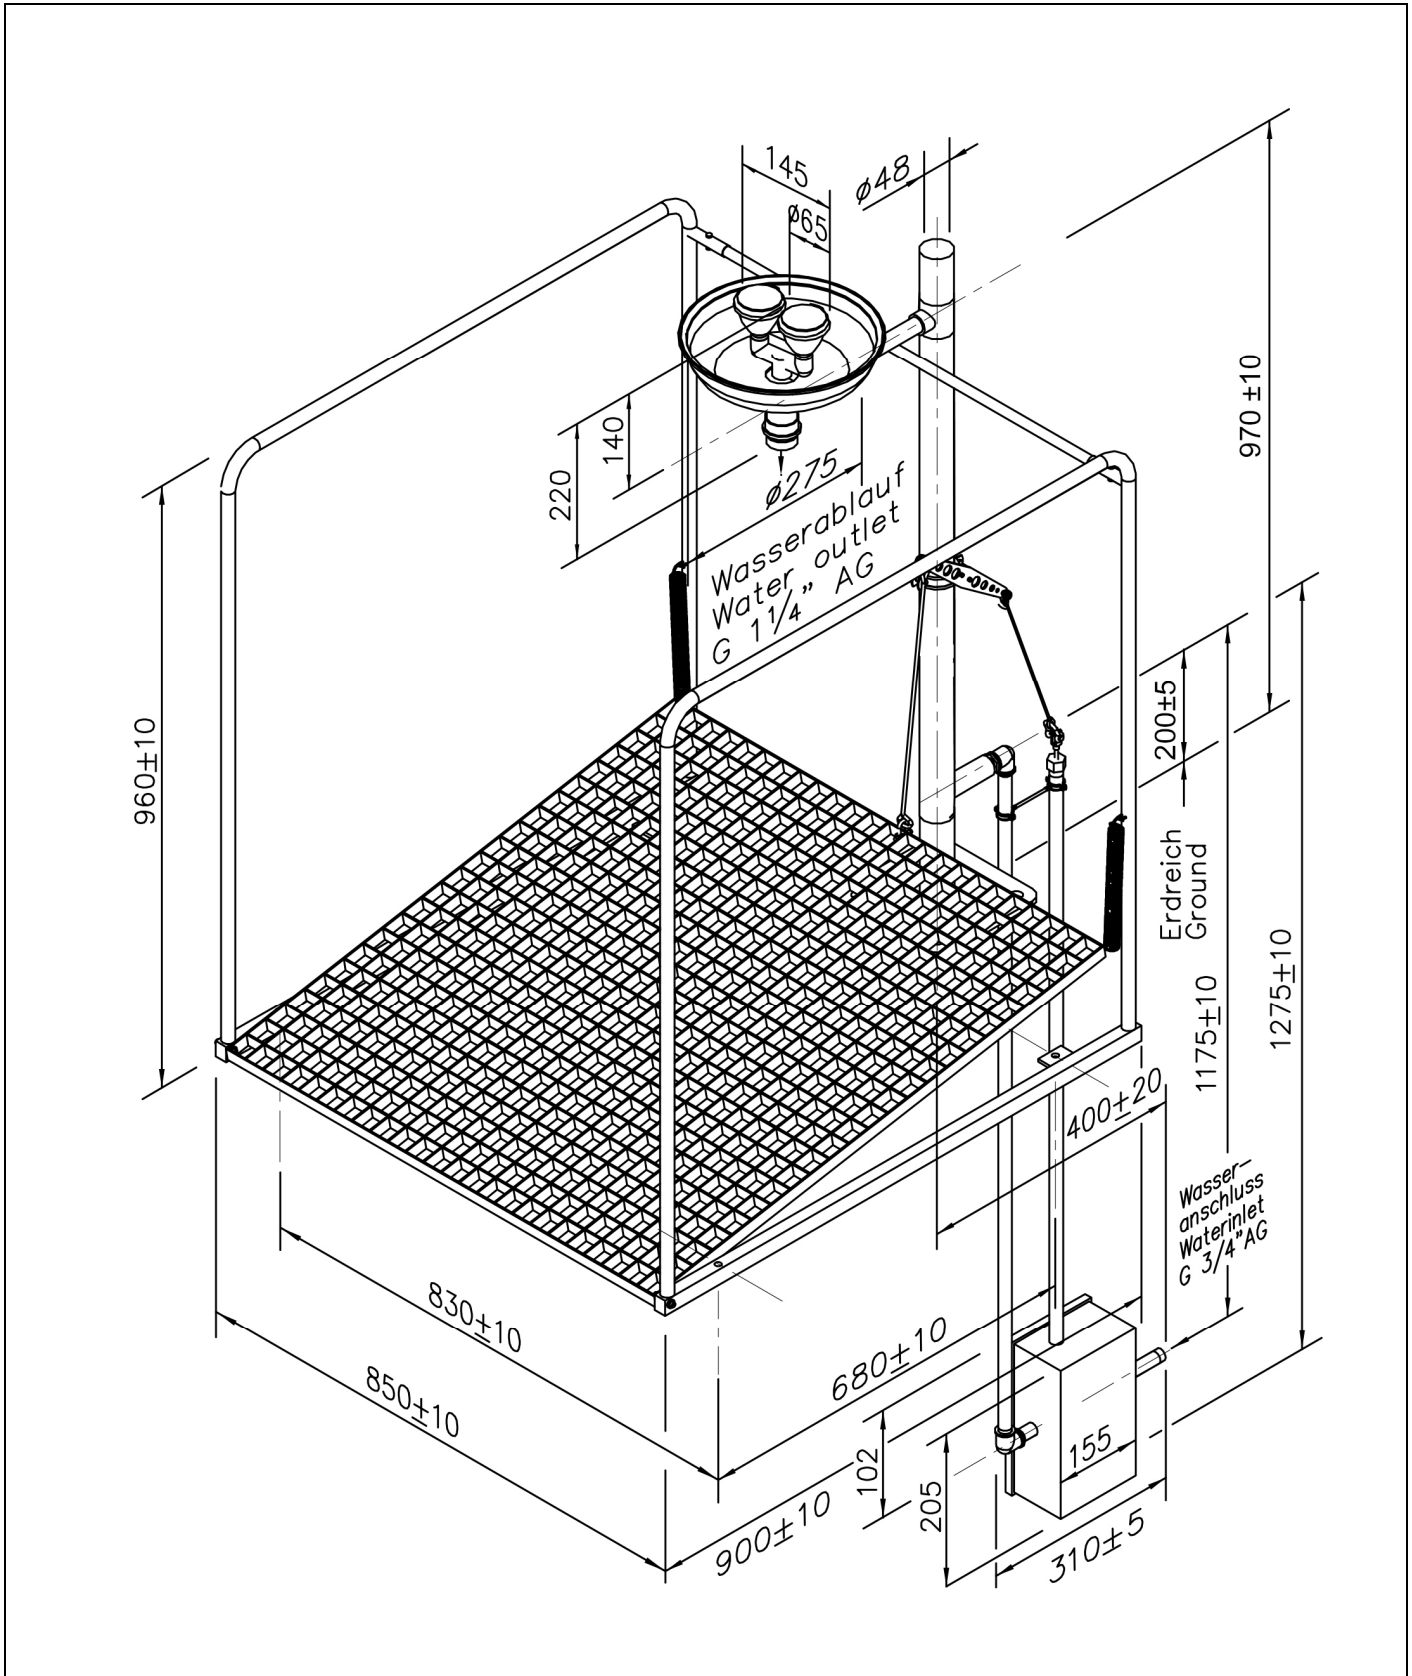

Technical description

PremiumLine frostprotected self-draining eye shower station with surrounding protection cage, with underfloor actuation

- frame made of stainless steel tubes, dimensions (H x W x D): 960 x 850 x 900 mm
- platform actuation for eye shower made of galvanized steel, mounted with chain on angle diversion, dimensions (W x D): 800 x 800 mm
- angle diversion made of stainless steel, with stainless steel attachment to the standpipe
- ball valve made of stainless steel as underfloor actuation, mounted in stainless steel cabinet, with pull rod activation 1000 mm, water inlet 3/4" male, DIN-DVGW tested and certificated, with automatic self-draining in 1000 mm depth
- base plate with 4 mounting holes of stainless steel, polished, dimensions 200 x 200 mm
- stand pipe 1 1/4" of stainless steel, polished, with bottom water inlet 1 1/4" female, total height 1025 mm
- integrated PremiumLine safety eye shower with stainless steel bowl, mounting height 970 mm
- connection pipe of stainless steel for easy installation and alignment of the shower, polished
- bowl made of stainless steel, diameter 275 mm, polished, water outlet 1 1/4" male
- high-performance spray heads made of stainless steel for large-scale dispersion of water, with plastic spray plate, largely free of calcification, with rubber sleeves and sealed dust caps with folding mechanism, mounted over distributor fork
- integrated flow regulation 14 litre / minute for a standard-compliant jet pattern at a specified working range of 2.5 to 5 bar flow pressure
- sign for eye shower according to EN ISO 7010 und ASR A1.3, self-adhesive PVC-film, 100 x 100 mm, viewing distance 10 metre
- according to BGI/GUV-I 850-0, DIN 1988 and EN 1717
- according to ANSI Z358.1-2014 and EN 15154-2:2006
- DIN-DVGW tested and certificated

Manufacturer: B-SAFETY or equal
Article-No.: BR 887 395

Technical specifications

Minimum flow pressure: 2.5 bar
 Operating pressure: 2.5 to 5 bar
 Flow rate: 14 l/min
 Water inlet: 3/4" male

Compliance with standards

- EN 15154-2:2006
 - ANSI Z358.1-2014

Approvals




- DIN-DVGW, DVGW, NW-0417CL0263
 - GOST-R, Zertifikats-Nr. 0615463

Product overview

BR 887 395

PremiumLine frostprotected self-draining eye shower station with surrounding protection cage, with underfloor actuation

Accessories for industrial safety showers

Product overview	Model	Material	Water inlet	Water outlet	Article-No.
	Maintenance ball valve for eye showers and safety showers with removable trigger lever.	stainless steel	3/4" female	3/4" female	BR 830 955
	Thermostatic mixing valve for eye showers and safety showers, adjustment range 20 - 43°C, scald protection 43°C, flow rate 60 l/min at 2 bar flow pressure.	brass	3/4" male and 1" male	3/4" male and 1" male	BR 710 950
	Flow switch for eye showers and safety showers, protection degree IP 65, electrical supply with 1.5 m cable.	brass	3/4" female	3/4" female	BR 710 800
	Flow switch for eye showers and safety showers, protection degree IP 65, electrical supply with 1.5 m cable. EX-Zone 1 & 2.	brass	3/4" female	3/4" female	BR 710 850EX
	Alarm system for eye showers & safety showers with siren-/flashlight combination. Prewired junction box inclusive electronic switch. Electrical supply: 230 V - 50 Hz	-	-	-	BR 015 800