


BR 960 005

ClassicLine mobile tank eyewash station with stainless steel tank

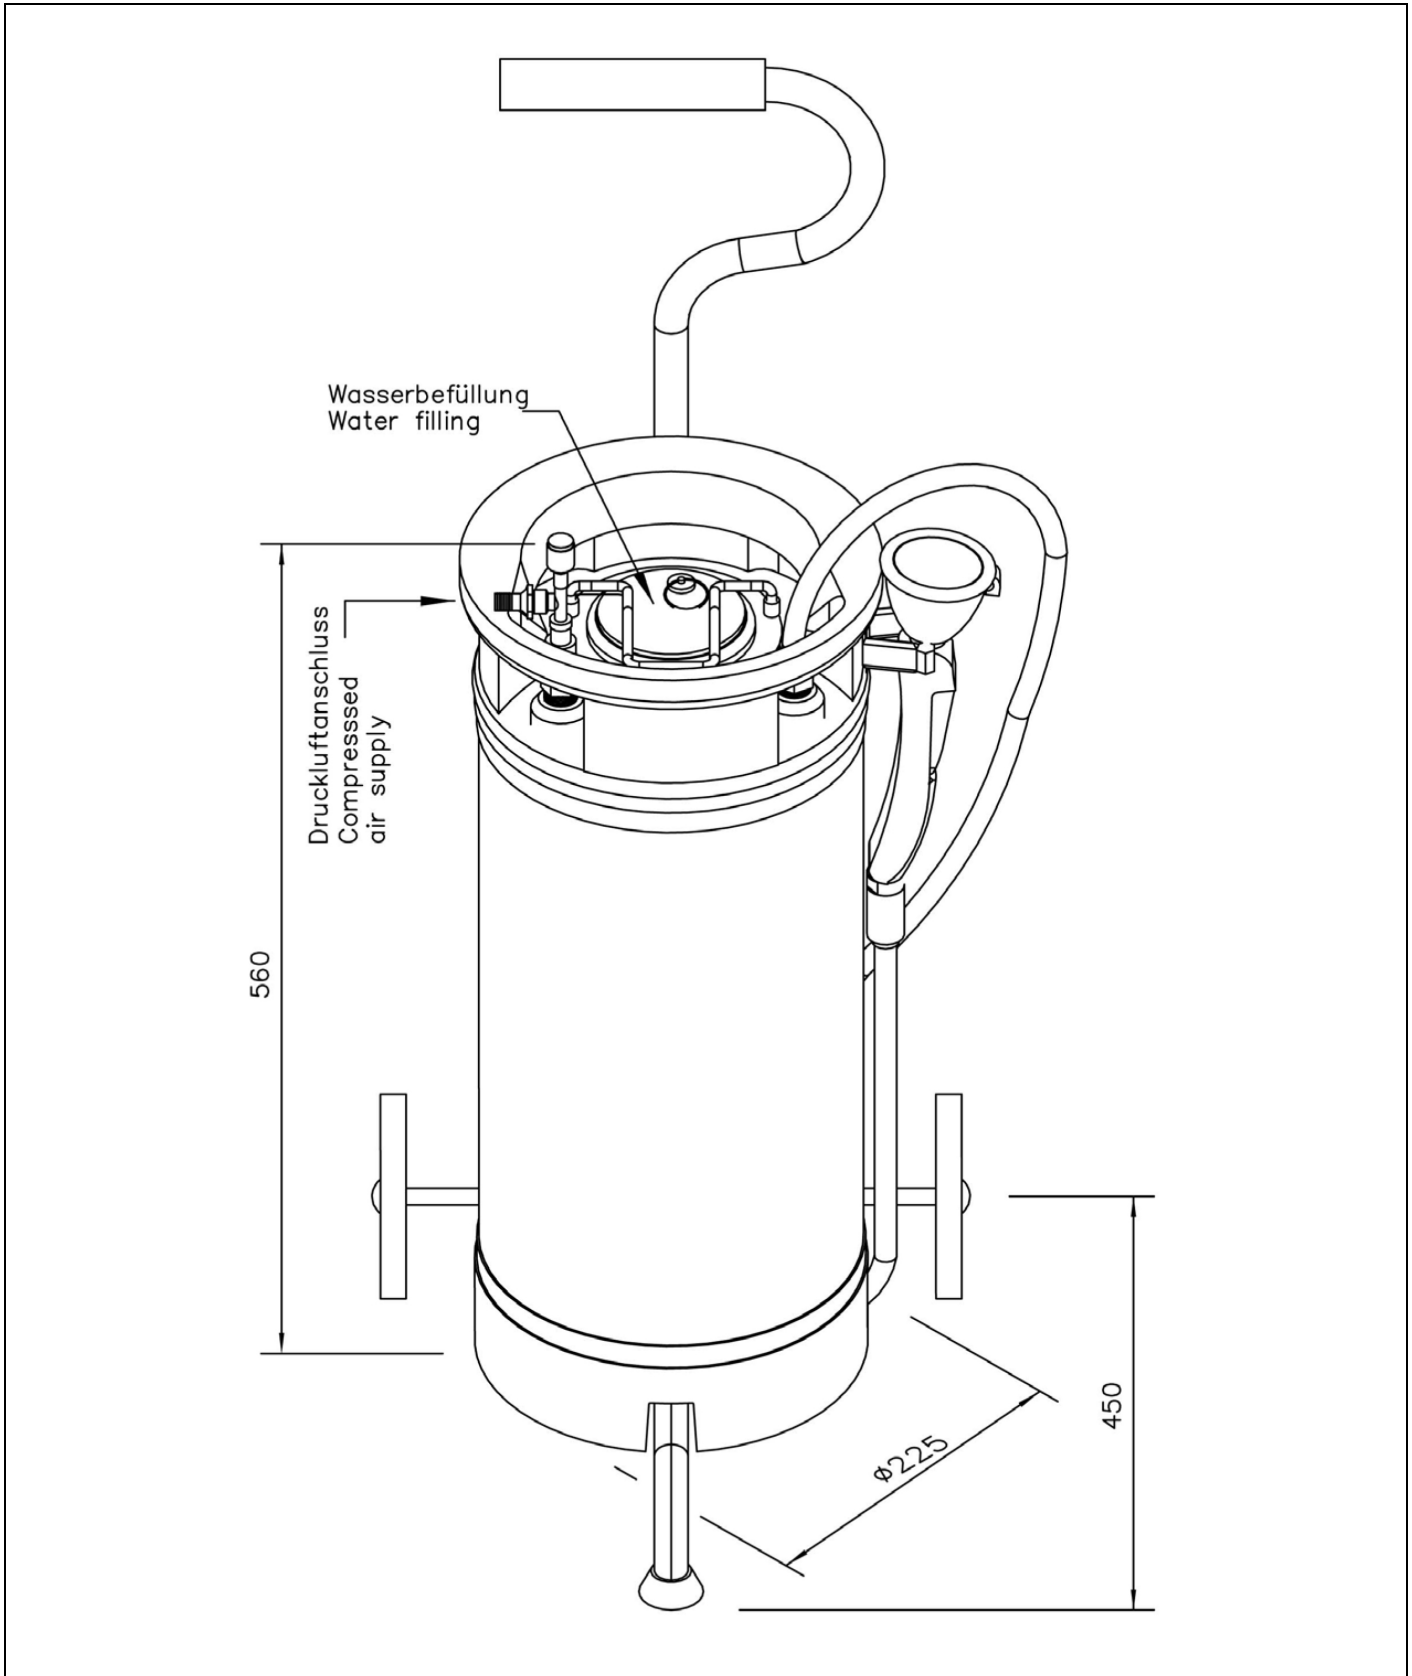

www.b-safety.com

Technical description

ClassicLine mobile tank eyewash station with stainless steel tank

- tank of stainless steel, with a capacity of 16 litres, on handcart with solid rubber tyres
- water inlet via large flap lid on the tank, compressed air connection tyre inflation valve
- for mobile use or when no water connection is available
- actuation by activation of the hand-held eye shower
- hand-held eye shower with one spray head, mounting by wall bracket on the tank
- ergonomically shaped handle with integrated, adjusting activation made of plastics, valve not self-closing
- aerators made of brass with a very limited spray pattern, chrome-plated
- integrated automatic flow regulator 7 litres / minute (1.7 litres / minute / 0.45 GPM) for a standard-compliant spray pattern
- integrated backflow preventer
- stainless steel covered hose, length 1.5 meter, water inlet 1/2" female, DIN-DVGW tested and certificated
- sign for eye shower according to EN ISO 7010 und ASR A1.3 mounted on the tank, self-adhesive PVC-film, 150 x 150 mm, viewing distance 15 metre
- dimensions (H x W x D): 850 x 450 x 225 mm
- according to ANSI Z358.1-2014 and EN 15154-4:2009

Manufacturer: B-SAFETY or equal
 Article-No.: BR 960 005

Technical specifications

| | |
|---------------------------|--------------------------------|
| Material | stainless steel, plastic |
| Dimensions (H x W): | 850 x 450 mm |
| Filling volume: | 14 litre |
| Filling pressure: | 7 bar |
| Flow rates: | 7 l/min / 1.7 l/min (0.45 GPM) |
| Flush times: | about 2 minutes / 5 minutes |
| Water filling: | flap lid |
| Compressed air connection | tyre inflation valve |

Norm conformity

- EN 15154-4:2009
- ANSI Z358.1-2014


Approvals

- GOST-R, Zertifikats-Nr. 0615463

Product overview

| | |
|------------------------|--|
| BR 960 005 | ClassicLine mobile tank eyewash station with stainless steel tank Flow rate 7 l/min - Flush time about 2 minutes |
| BR 960 005 / 1L | ClassicLine mobile tank eyewash station with stainless steel tank Flow rate 1.7 l/min (0.45 GPM) - Flush time about 5 minutes |

Accessories for Tank-Eyewash Stations

| Product overview | Model | Dimensions (H x W x D) | Capacity | Article-No. |
|---|--|------------------------|---------------|--------------------------|
|  | <p>Antibacterial addition for tank eyewash stations and tank safety showers. Disinfects and preserves water for up to 6 months, dosing: 10 ml to 100 litres water.</p> | <p>-</p> | <p>100 ml</p> | <p>BR 910 980</p> |